


5/16" CLEARANCE HOLE
(4 EA)

THREADED KNOB
TO SECURE ROTATION

5/16" THREADED HOLE
(4 EA)

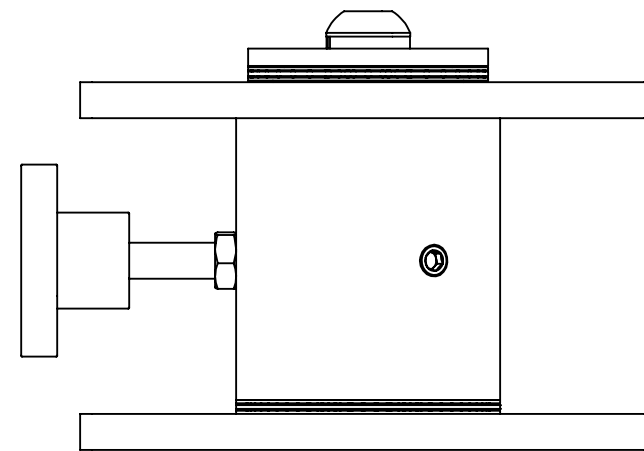

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: $\pm 1/16$
ANGULAR: ± 2 Degrees
TWO PLACE DECIMAL: $\pm .02$
THREE PLACE
DECIMAL: $\pm .005$
SEE BACK FOR SIGNOFF
SHEET IF APPLICABLE
MATERIAL

FINISH

DO NOT SCALE DRAWING

NAME	DATE
LOUIS CUBERO	08/03/2021

CHECKED

ENG APPR.

CAGE NUMBER: 1QPN7

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MARIETTA NONDESTRUCTIVE TESTING.
ANY REPRODUCTION IN PART OR AS
A WHOLE WITHOUT THE WRITTEN PERMISSION
OF MARIETTA NONDESTRUCTIVE TESTING
IS PROHIBITED.



MARIETTA NONDESTRUCTIVE TESTING
530 COMMERCE PARK DRIVE
MARIETTA, GA 30060
(770) 528-9000

TITLE:

**UNIVERSAL PIVOT HUB
ASSEMBLY**

SIZE

B

DWG. NO.

UPHAA01A00

REV

SCALE: 1:2

WEIGHT: 13.5 lb

SHEET 1 OF 1